


BKG ADVANTAGE

Service Lift



**SHORTS
LIFTS**

*Suppliers of High Quality Lifts and Lift Components
to the UK Lift Industry*

BKG ADVANTAGE SERVICE LIFT

STANDARD SPECIFICATION

CAPACITY
50kg or 100kg

SPEED
0.45 m/s

DRIVE SYSTEM
Traction Drive

ELECTRICITY SUPPLY
400 Volts, 3 Phase or 240 Volts, Single Phase

TRAVEL
Up to 4m (adjustable on site)

ARRANGEMENT
2 Floor / 2 Entrance
Single or Through Entry (adjustable on site)

STRUCTURE
Galvanised steel structure

CAR
Finished in Stainless Steel
For Sizes Refer to Chart Below
Removable Mid-Shelf

LANDING DOORS
2 Hour Fire-rated
Finished in Stainless Steel

CONTROL SYSTEM
Microprocessor Controller

ELECTRICAL
Additional Auxiliary Main Contactor
Phase Failure Reversal Relay
Position Indicator
Lift in Use indicator
Lift Arrival Buzzer
Door Open Alarm Buzzer
Anti Quick-reversal
Overtravel Timer
Hand Lamp
Light and Socket within Machine Room
Wiring in Loom Form

GENERAL
Full Set of Warning Notices
User Manual
Comprehensive Installer Instructions
Layout Drawings & Wiring Diagrams
Compliance with EN81 Part 3
Compliance with European Machinery Regulations
Carries the European 'CE' Mark


OPTIONAL FEATURES

Lockable Machine Room Access Door
Finished in Stainless Steel
2 Hour Fire-rated


Heated car floor
Additional car shelves
Machine room access ladder
Brushed aluminium roller shutter fitted with electrical contact (two shutters must be fitted on all through entry cars to comply with regulations)

ADVANTAGE Lifts are ex stock, delivery subject to availability. Please check stock position before ordering.


AVAILABLE IN THREE ARRANGEMENTS AS SHOWN ON PLAN BELOW
(AVAILABLE WITH OR WITHOUT MACHINE ROOM DOOR)

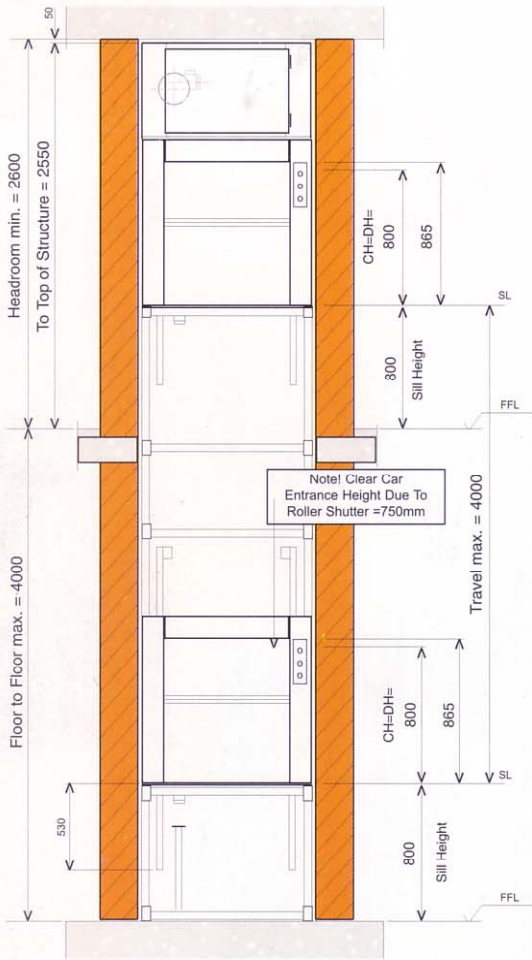


ELEVATION SECTION "X-X"

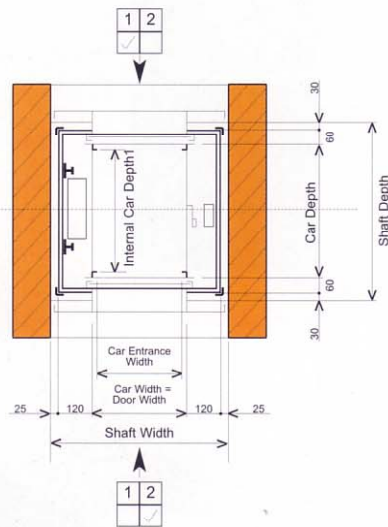

THROUGH ENTRY WITH ROLLER SHUTTERS

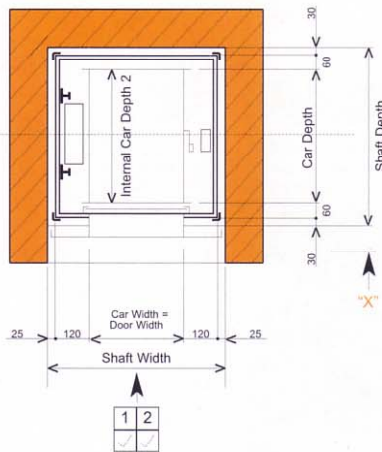

SINGLE ENTRY WITHOUT ROLLER SHUTTER

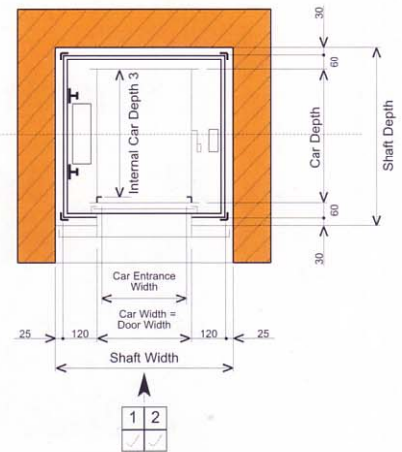

SINGLE ENTRY WITH ROLLER SHUTTER

Capacity	Model	Speed	Car Width = Door Width	Car Depth	Car Entrance Width	Shaft Width	Shaft Depth	Internal Car Depth 1	Internal Car Depth 2	Internal Car Depth 3
50kg	50.45/4	0.45 m/s	460	570	420	750	750	500	570	535
100kg	100.45/4	0.45 m/s	710	820	670	1000	1000	750	820	785

The Advantage Service Lift is Available From:



PO Box 258
Bradford BD2 1QR
Tel: 01274 305066
Fax: 01274 736212
e-mail: info@shorts-lifts.co.uk
web site: www.shorts-lifts.co.uk



Under our policy of continuing development, Shorts Lifts reserve the right to alter the dimensions or specification of any equipment illustrated or described in this brochure without prior notice. The details contained in this brochure do not constitute an offer.