


Waiver:


This data sheet is for guidance only and must not be used for proper working drawings. Please contact supplier for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice. 01603 866206

SYSTEM 21

Maxi-M8 8 Person (630Kg)

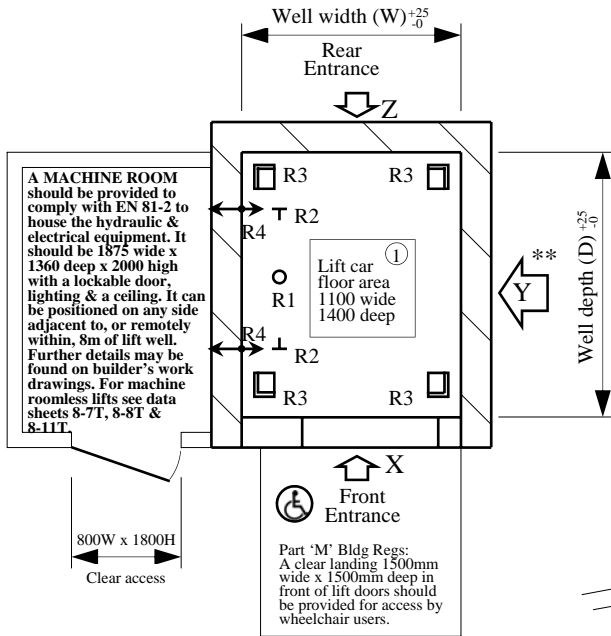

Wall Mounted Models	Lifting beam supplied by builder
Structure Mounted Models	Lifting beam supplied with lift

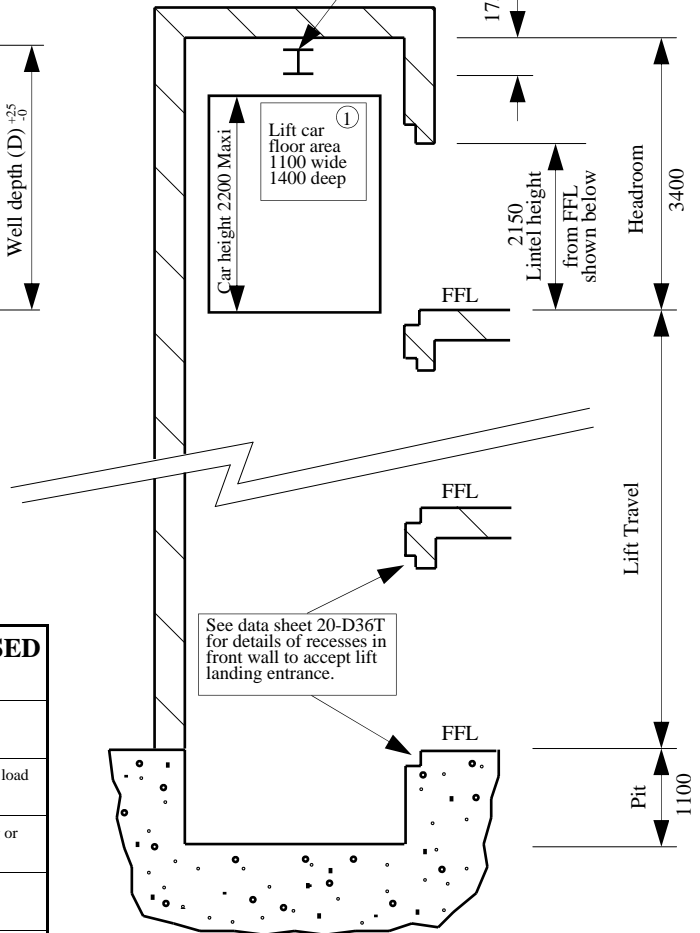

EQUIVALENT DEAD LOADS IMPOSED DUE TO LIFT OPERATION (Kg)

		Wall Mounted Models	Structure Mounted Models	Type of Loading
Lift Pit Floor	R1	3325	3325	Load due to car weight + load + hydraulic cylinder
	R2	3070	3070	Load due to car buffering or safety gear operation
	R3	not applicable	885	Load at base of structure in each corner
Side Wall	R4	318	100*	Push in/Pull out load

*Applies to lift structure on all sides in the pit, headroom, at each floor level, and at a maximum of 4m intervals.

IMPORTANT

On Wall Mounted Models, Unistrut inserts ref P3270 to be built into lift pit and lift well walls by builder *before* installation. See specific Builder's Work Drawings for precise details.

MODEL REF	LIFT DOORS ARRANGEMENT	WALL MOUNTED MODELS				STRUCTURE MOUNTED MODELS				Lift Car Clear Entrance			
		Plan Well Dimensions		Plan Well Dimensions		Plan Well Dimensions		Plan Well Dimensions					
		Front entrance	Front & rear entrance	Front entrance	Front & rear entrance	Front entrance	Front & rear entrance	Front entrance	Front & rear entrance				
	Car Doors	Landing Doors	W	D	W	D	W	D	W	D	W	H	
M8-2S 2S (800)		Auto 2 panel side opening 2S	Auto 2 panel side opening 2S	1500	1770	1500	1880	1650	1850	1650	1950	800	2000
M8-2S 2S (900)		Auto 2 panel side opening 2S	Auto 2 panel side opening 2S	1625	1770	1625	1880	1775	1850	1775	1950	900	2000
M8-2C 2C (800)		Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	1800	1750	1800	1880	1960	1820	1960	1880	800	2000
M8-2C 2C (900)		Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	2000	1750	2000	1880	2180	1820	2180	1880	900	2000

Note: Shaft sizes are for guidance purposes only and subject to change so it is crucial that you contact us concerning your specific requirements

① Part 'M': This lift car size is recommended in Part 'M' of the building Regulations and will carry a wheelchair and attendant.



**For lifts with adjacent entrance(Y) see data sheet 8-5T for

8-3T
03/05/06